

Features

- 1-channel signal conditioner
- 115 V AC supply
- Level sensing input
- Adjustable range 1 kΩ ... 30 kΩ
- Latching relay output
- Minimum/maximum control

Function


This signal conditioner provides the AC measuring voltage for the level-sensing electrodes.

Once the measured medium reaches the electrodes, the unit reacts by energizing a form C changeover relay contact.


The module is voltage and temperature stabilized and guarantees defined switching characteristics. An electronic holding circuit is used that allows minimum/maximum control. Since the conductance of the media may vary, the relay response sensitivity is adjustable.

The normal output state can be reversed through the mode of operation switch S1.

Assembly

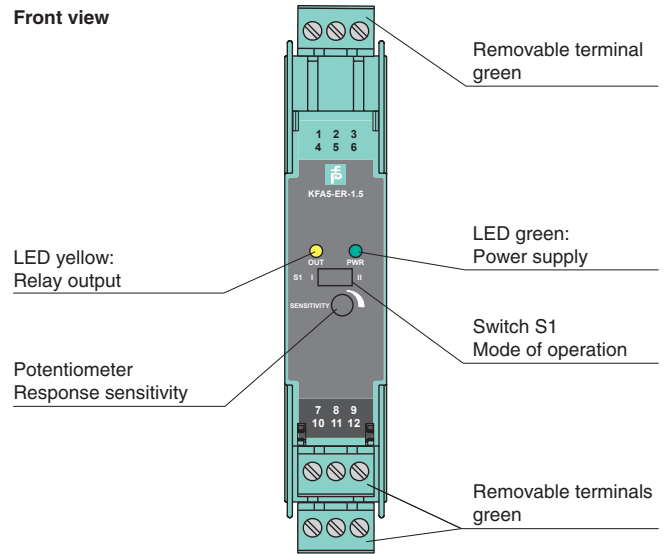

Connection

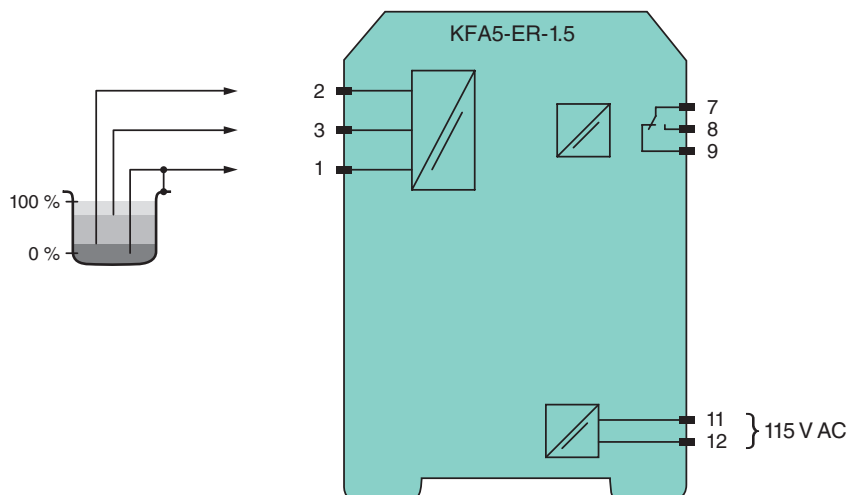

Release date 2009-05-06 17:43 Date of issue 2009-05-06 096047_ENG.xml

| | |
|--|--|
| General specifications | |
| Signal type | Digital input |
| Supply | |
| Connection | terminals 11 (L1), 12 (N) |
| Rated voltage | 103.5 ... 126 V AC , 45 ... 65 Hz |
| Power consumption | approx. 0.8 W |
| Input | |
| Connection | terminals 1 (mass), 2 (min), 3 (max) |
| Open circuit voltage/short-circuit current | approx. 10 V AC (approx. 1 Hz) / approx. 5 mA |
| Control input | min./max. control system: terminals 1, 2, 3 on/off control system: terminals 1, 3 |
| Response sensitivity | 1 ... 30 kΩ , adjustable via potentiometer (20 turns) |
| Output | |
| Connection | terminals 7, 8, 9 |
| Output | 1 changeover contact |
| Contact loading | 253 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load |
| Energized/de-energized delay | approx. 1 s / approx. 1 s |
| Electrical isolation | |
| Input/output | basic insulation according to EN 50178, rated insulation voltage 253 V _{eff} |
| Input/power supply | basic insulation according to EN 50178, rated insulation voltage 253 V _{eff} |
| Output/power supply | basic insulation according to EN 50178, rated insulation voltage 253 V _{eff} |
| Directive conformity | |
| Electromagnetic compatibility | |
| Directive 2004/108/EC | EN 61326-1:2006 |
| Low voltage | |
| Directive 2006/95/EC | EN 50178:1997 |
| Conformity | |
| Insulation coordination | EN 50178 |
| Electrical isolation | EN 50178 |
| Electromagnetic compatibility | NE 21 |
| Protection degree | IEC 60529 |
| Ambient conditions | |
| Ambient temperature | -20 ... 60 °C (253 ... 333 K) |
| Mechanical specifications | |
| Protection degree | IP20 |
| Connection | screw connection, max. 2.5 mm ² |
| Mass | approx. 110 g |
| Dimensions | 20 x 107 x 115 mm (0.8 x 4.2 x 4.5 in) , housing type B1 |
| Mounting | pull-out latches using for screw mounting |
| Indication and operation | |
| Operating elements | switch S1 Position I open circuit current: In the open circuit current principle, the relay becomes active when the limit is reached. Position II closed circuit current: In closed circuit current principle, the relay is activated when power is applied. The relay is deactivated when the limit is reached. |
| General information | |
| Supplementary information | Statement of Conformity, Declaration of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . |

Release date 2009-05-06 17:43 Date of issue 2009-05-06 096047_ENG.xml